

Bailey – High Efficiency Inset Gas Fire (Glass Fronted)

Index # 122 - Rev-6 / 21-Sept-2021

DESCRIPTION

The Bailey is a glass fronted gas fire which can be used to replace any existing inset gas fire installed in the UK or as part of a full traditional fireplace installation with surround and hearth. The Bailey has been designed to have the appearance of a wood burning stove but with the low running costs of gas. Tested to the latest UKCA & UKNI standard, with a Class 1 Efficiency Rating. Save up to 70% in running costs when replacing an old inset fire.

TRIM OPTIONS

The standard fire is available with either a Satin Black Steel or Brushed Steel Trim. The fire can be upgraded with a special trim which allows the fire to be installed as a hole in the wall fire – please see Specification Sheet #125.

UKCA & UKNI APPROVAL

The Bailey is UKCA & UKNI approved for I2H - G20, 20mBar and is available for the United Kingdom Only

POWER RATING & RUNNING COSTS

Natural Gas Only
Heat Input is 2.5Kw, Heat Output is 1.8Kw.
Running Cost 11p/hour, Flow Rate: 0.30m3/Hour

DIMENSIONS

Overall dimensions of the fire – See drawings on page 2

OTHER TECHNICAL INFORMATION

1. Efficiency Rating - 72%, Efficiency Class 1, NOx Class 4
2. The Bailey is available for Natural Gas Only.
3. ODS (Oxygen Depletion System) fitted which monitors the oxygen levels in the room (gas only).
4. No additional room ventilation is required with this fire.
5. Manual Ignition – The control is hidden behind the trim
6. Construction Opening - The inset fire will fit a standard fireplace opening of 430mm (w) x 570mm (h). The “minimum” depth is 129mm. The Bailey is designed to be installed within a fireplace opening or cavity which is built in line with current regulations from non-combustible materials.
7. Chimney - The Bailey can be installed in any chimney currently available in the UK if the flue has a minimum diameter of 125mm (or area of 123cm²) and a “minimum” length of 3m. The Bailey is supplied as a standard inset fire to fit a Class 1, Class 2, pre-cast, or flue liner system. The fire can be installed in a brick-built chimney however a gap must be provided for debris. Brick chimneys will require sweeping and testing prior to installation. See install booklet.
8. Pipe Work - The fire has a kW power rating of 2.5kw and requires an 8mm inlet and 0.25m³/hr of gas. The pipe work must be able to maintain the inlet pressure at 20mBar when operated on full.
9. Glass - This is a glass fronted appliance and the glass becomes very hot during operation. It is advised to mount the fire at a height away from small children and that when operating the appliance in a room where children or elderly people will be present that a fireguard is used.



CVO reserve the right to amend and improve the specification sheets without prior notice. If in doubt about any aspect of this specification, please call. The specification is not to be used to install the fireplace. Every fire is supplied with an official install booklet. Spirit Fires Limited own the Spirit, CVO and Firevault Trademarks. Copying and distribution of these specifications is not permitted without the permission of Spirit Fires Ltd.


All dimensions include a +/-2mm tolerance.

Spirit Fires Ltd, 4 Beaumont Square, Durham Way South, Newton Aycliffe, County Durham, DL5 6XN
Sales: +44 (0)1325-301020 Office: +44 (0) 1325 327 221 Fax: +(0)1325 327 292 Email: sales@cvo.co.uk Web: www.cvo.co.uk

SHOWROOM: CVO Fires can be seen live in our firevault showroom based in the North East, UK.
Visit www.firevault.co.uk or call 01325-301020 for full contact details, location maps and directions.

Bailey – High Efficiency Inset Gas Fire (Glass Fronted)

Index # 122 - Rev-6 / 21-Sept-2021

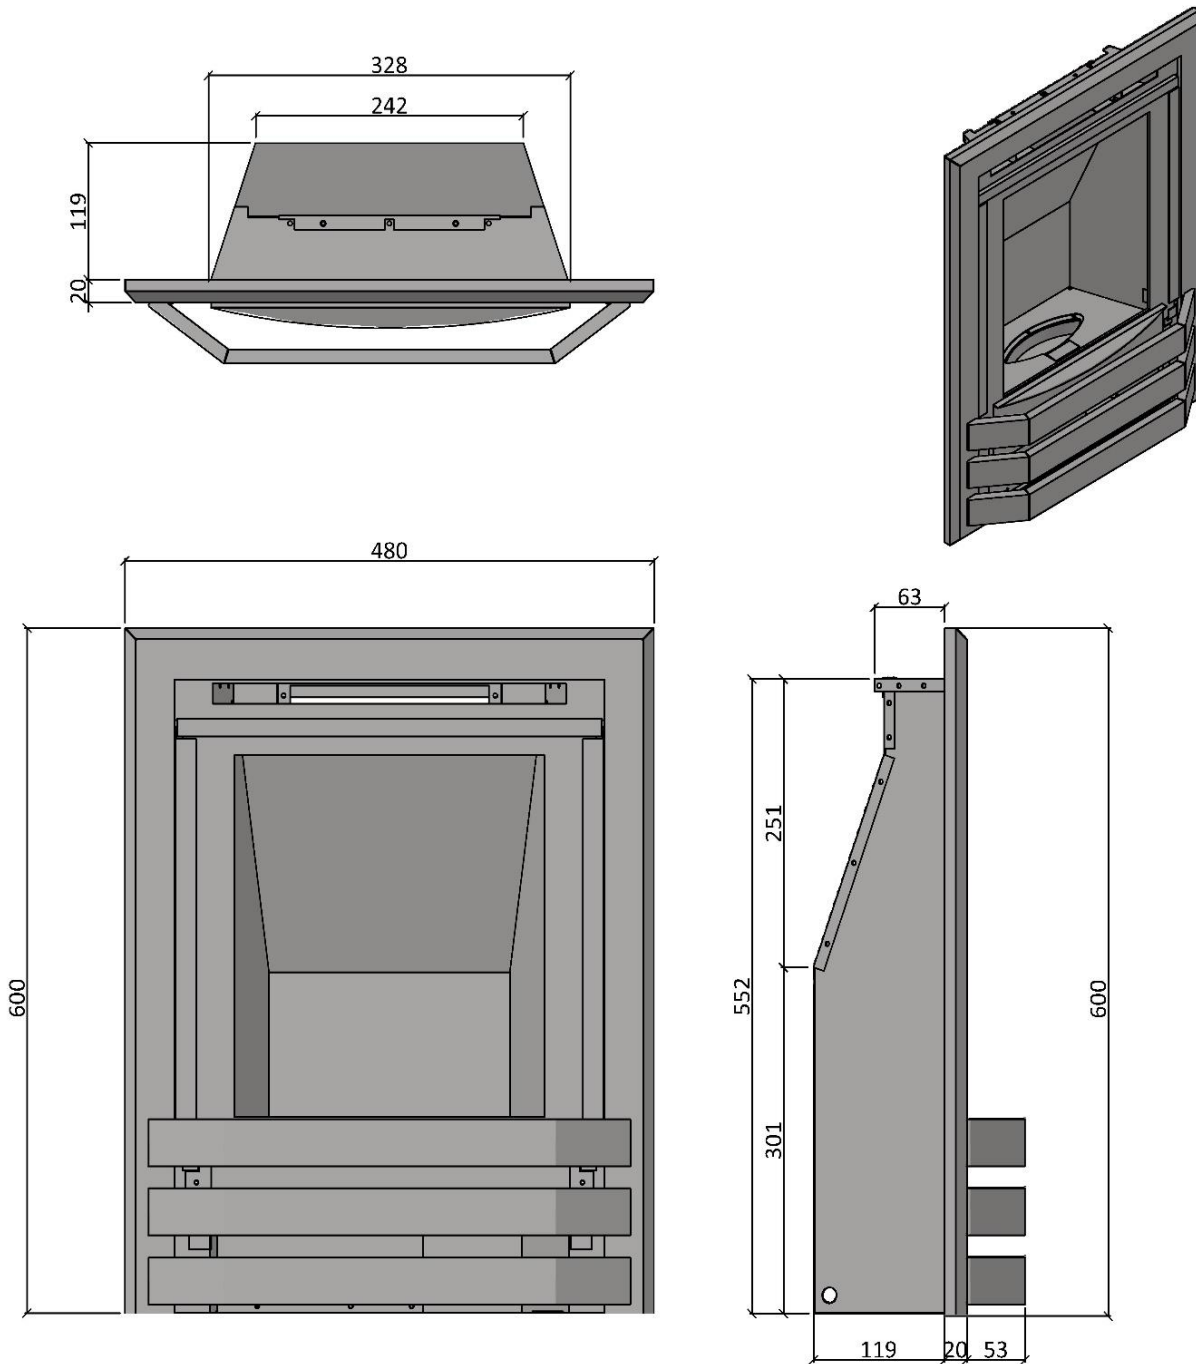

CVO reserve the right to amend and improve the specification sheets without prior notice. If in doubt about any aspect of this specification, please call. The specification is not to be used to install the fireplace. Every fire is supplied with an official install booklet. Spirit Fires Limited own the Spirit, CVO and Firevault Trademarks. Copying and distribution of these specifications is not permitted without the permission of Spirit Fires Ltd.
All dimensions include a +/-2mm tolerance.

Spirit Fires Ltd, 4 Beaumont Square, Durham Way South, Newton Aycliffe, County Durham, DL5 6XN
Sales: +44 (0)1325-301020 Office: +44 (0) 1325 327 221 Fax: +(0)1325 327 292 Email: sales@cvo.co.uk Web: www.cvo.co.uk

SHOWROOM: CVO Fires can be seen live in our firevault showroom based in the North East, UK.
Visit www.firevault.co.uk or call 01325-301020 for full contact details, location maps and directions.